

# Flat Tube



## Features

- After insert to the electric wire, it won't be slipped because it is holding electric wire.
- It is suitable to work by hand because of flat type.
- Materials are excellent at insulating because of enough thickness.
- You can use it with whether solderless terminal or bear conductor.
- You can use even large size for a variety of each electric wire such as parallel cord and VA.


## Color

- White (standard)
- Black
- Red
- Blue
- Green
- Yellow

## Material

Flexible polyvinyl chloride

## Dimensions

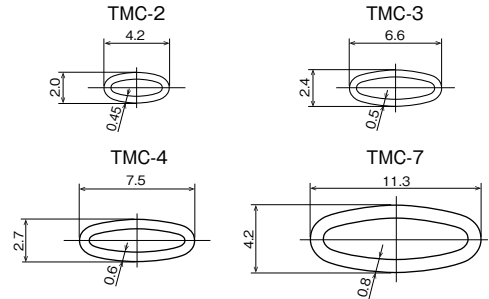

## Rating

Insulation resistance	1,000MΩ or more
Withstand voltage	5,000V / min



Section view

Part No.	Inner diameter	Applicable wire	1case (1roll)	Sales unit
TMC-2	φ2.3	0.4m以下	200m	1case
TMC-3	φ3.9	0.4～2m		
TMC-4	φ4.5	0.75～3.5m		
TMC-7	φ7.3	3.5～8m	100m	