

Accessories

Terminal block


KT8-6P *Terminal block to install on the wall side

600V / 15A / 2mm² [Screw size M3.5] / 6poles




Weight: 27g
Sales lot: 1pc

Dimension



Applicable crimp terminal




KTW8-11P

600V / 15A / 2mm² [Screw size M3.5] / 11poles




Weight: 47g
Sales lot: 1pc

Dimension

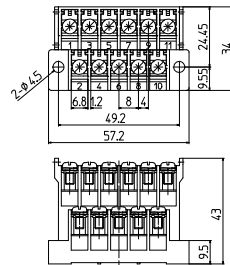

Applicable crimp terminal



Specifications

Rated voltage	AC,DC 600V
Rated current	15A
Insulation resistance	100MΩ or more (DC500V)
Withstand voltage	AC 2500V / min
Applicable wire	2.0mm ² / MAX
Tightening torque	1.4N · m
Ambient temperature	-25°C ~ +100°C (No freezing and condensations)
Relative humidity	45% ~ 85%

*Please use the terminal block within operating ambient temperature, when it is in the BOX.

Materials

Terminal block main body	PBT (UL94V-0)
Conductive plate	Brass (Ni plating)
Terminal Screw	SWCH (Zn+trivalent chromate-plating) M3.5x6.7L
Washer	SWCH (Zn+trivalent chromate-plating)
Spring	SUS

*Please use M4x10L tapping screw when installing terminal block
*Tightening torque when installing terminal block...1.0N · m
*Self-tapping screws for mounting terminal blocks are not included.

Applicable Short bar

BB8A-2, 4, 6

Short bar

BB8A-2



BB8A-4




BB8A-6



BB8A-8



Dimension

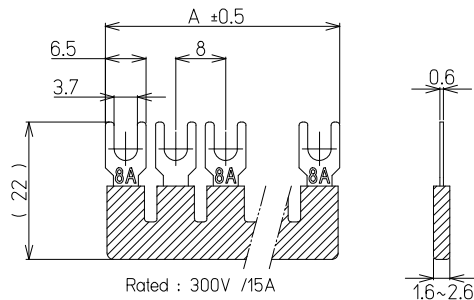

No. of poles	Part No.	A	Weight	Sales lot
2	BB8A-2	14.5mm	1.1g	10pcs
4	BB8A-4	30.5mm	2.2g	10pcs
6	BB8A-6	46.5mm	3.5g	10pcs
8	BB8A-8	62.5mm	4.6g	10pcs

Material : Copper alloy (Ni plating) , PVC