

Accessories

Terminal block for optional installation



CNT15-8

600V / 15A / 2mm² [Screw size M3.5]/8poles




Weight: 63g
Sales lot: 1pc

■ Dimension

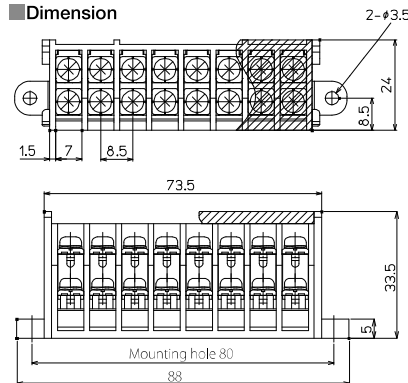

■ Applicable crimp terminal

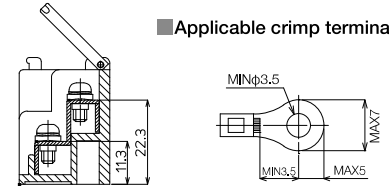



CNT15-10

600V / 15A / 2mm² [Screw size M3.5]/10poles




Weight: 77g
Sales lot: 1pc

■ Dimension

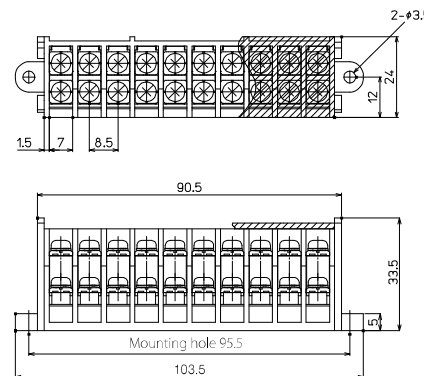

■ Applicable crimp terminal

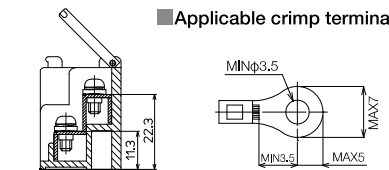

Specifications

Rated voltage	AC,DC 600V
Rated current	15A
Insulation resistance	100MΩ or more(DC500V)
Withstand voltage	AC 2500V / min
Applicable wire	2.0mm ² / MAX
Tightening torque	1.4N·m
Ambient temperature	-25°C~+100°C (No freezing and condensations)
Relative humidity	45%~85%

Materials

Terminal block main body	PBT(UL94V-0)
Conductive plate	Brass(Ni plating)
Terminal Screw	SWCH(Zn+trivalent chromate-plating) M3.5×8L
Cover	PC(UL94V-2)
Name plate	Paper

■ Applicable Short bar

BB8.5-2, 4, 8, 10

Short bar

BB8.5-2




BB8.5-4



BB8.5-8



BB8.5-10

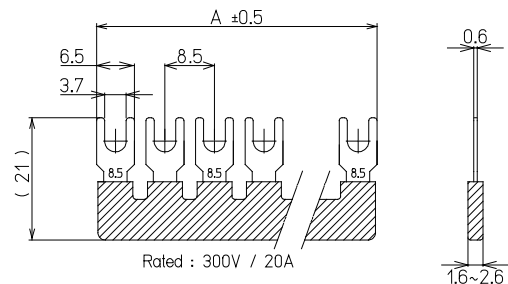

No. of poles	Part No.	A	Weight	Sales lot
2	BB8.5-2	14.5mm	1.1g	10pcs
4	BB8.5-4	31.5mm	2.2g	10pcs
8	BB8.5-8	65.5mm	4.6g	10pcs
10	BB8.5-10	82.5mm	5.9g	10pcs

Material : Copper alloy(Ni plating) , PVC