

Rateds


	JIS	UL·cUL	TUV	Applicable solderless terminal (mm)
Rating voltage	125V	125V	125V	
Rating current	1A	1A	1A	
Connectable wire	1.25mm ² / MAX	AWG22~16	AWG22~16	
Insulation resistance	100M Ω or above (With DC500V)			
Withstand voltage	600V / 1minute			
Standard tightening torque	1.2N·m			
Operating ambient temperature	-15℃~+60℃(No freezing or condensation)			
Standard	JIS C 8201-7-1 (JIS C 2811)	UL1059 C22.2 No158	EN60947-7-1	

Specifications


No	Description	Material	Size	Surface treatment	Remarks
1	Terminal Block	Modified PPE (Gray)			UL94V-0
2	Conductive Plate A,B	Brass	t=1	Sn	
3	Connection screw	Steel	M3X9.5L	Ni	±Free terminal screw with spring
4	Under case	Modified PPE (Gray)			UL94V-0
5	Rail latch	Acetal copolymer (yellow)			
6	Substrate	Glass-epoxy	t=1.6		
7	Connector				FCN-364P024-AU (FUJITSU)
8	Cover	Polycarbonate			
9	Name Plate	Paper			
(10)	Mounting Rail	Aluminum		DAV	※ Optional
(11)	Stopper	Steel		Zn	HDV-1 ※ Optional

※There are two short bars (BB7.62-2) other than the above.
Please carry out wire connection by the polarity of COM of a connector using a short bar.

Connecting Diagram
Top View

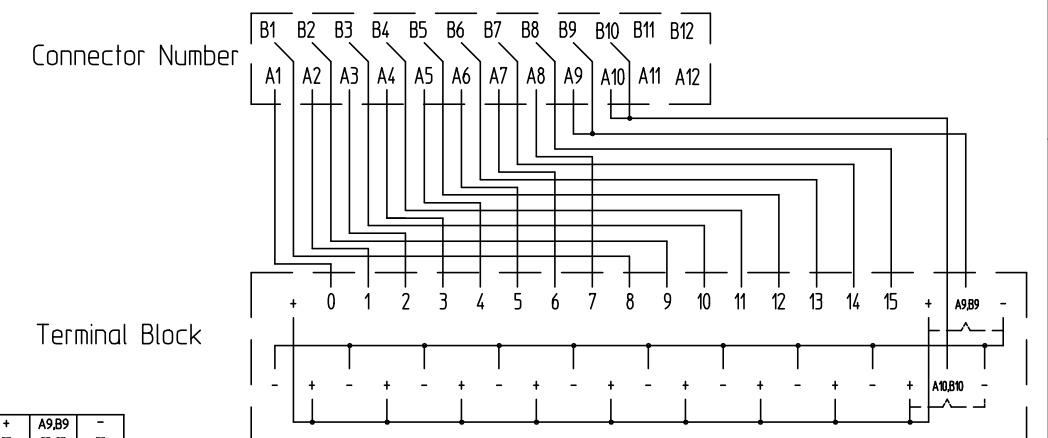

Name Plate

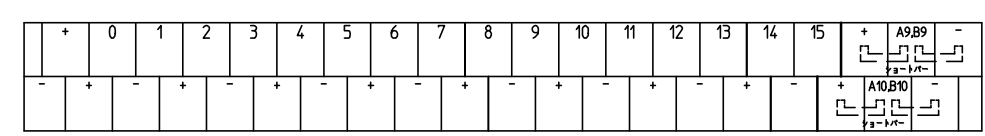

参考図

承認 APPROVED 菅沼 2012/12/19	検閲 CHECKED 小松 2012/12/19	製図 DRAWING 宮澤 2012.12/19	設計 DESIGNED	名称 TITLE PCI-4F24
製品コード CODE No.		単位 UNIT mm	尺度 SCALE 1 / 1	Specifications
公差 TOLERANCE			図番 DRAWNG No. TA12344-01	REV. SHEET 1 / 1

改番 REV.	訂正記事 DESCRIPTION OF REVISION	年月日 DATE	担当 BY