
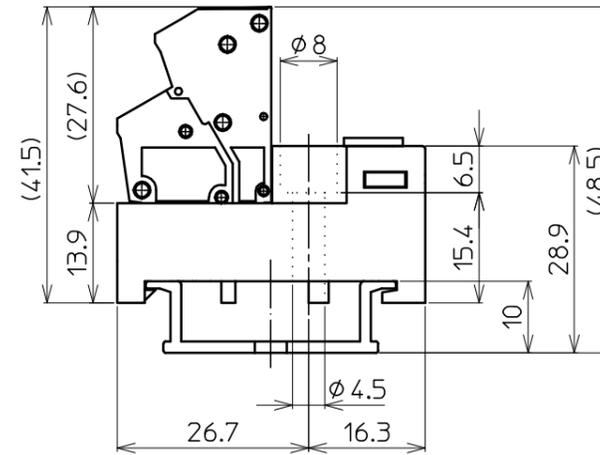
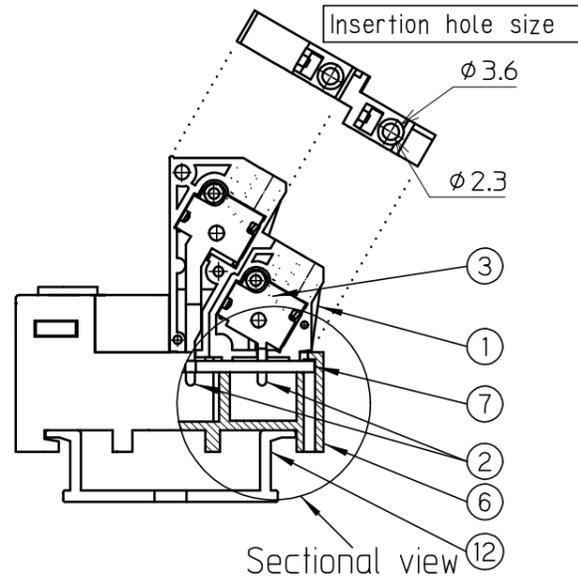


参考図

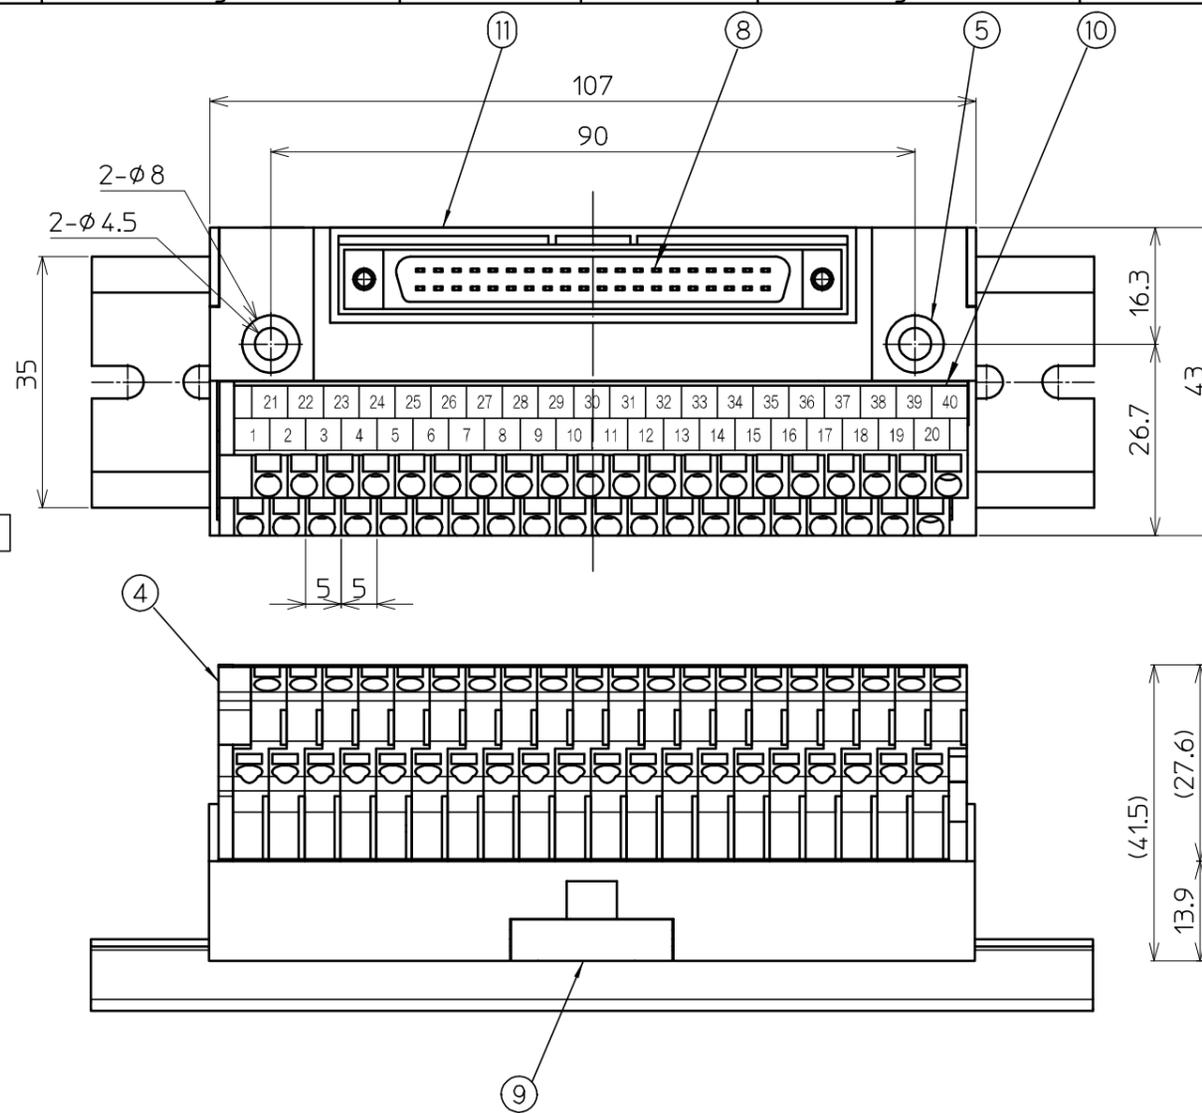


Specification

No.	Description	Material	Size	Surface Treatment	Remarks
1	Terminal Block	66Nylon(Glay)			UL94V-0
2	Conductive Plate A,B	Copper alloy	t=0.5	Sn	
3	Connecting Spring	SUS	t=0.3		
4	Side Plate	66Nylon(Glay)			UL94V-0
5	Upper case	Modified PPE (Glay)			UL94V-0
6	Lower case	Modified PPE (Glay)			UL94V-0
7	Substrate	Glass epoxy	t=1.6		
8	Connector				1747053-1(TE Connectivity)
9	Rail latch	POM (Orange)			
10	Name seal				
11	Seal				
12	Rail	Aluminum	DIN35mm		DAV.DAS


Ratads

Rating voltage		125V
Rating current		1A
Insulation resistance		100M Ω or above (With DC500V)
Withstand voltage		AC600V / 1minute
Connectable wire	Pressure terminal	0.25mm ² ~ 1mm ² / AWG26~AWG18 Conformity DIN46228-4 8~10mm
	Single	$\phi 0.5 \sim \phi 1.6$ 9~10mm
	Twist	0.08mm ² ~ 1.25mm ² / MAX AWG28~AWG16 9~10mm
Operating ambient temperature		-10 $^{\circ}$ C~+60 $^{\circ}$ C(No freezing or condensation)

Connecting diagram

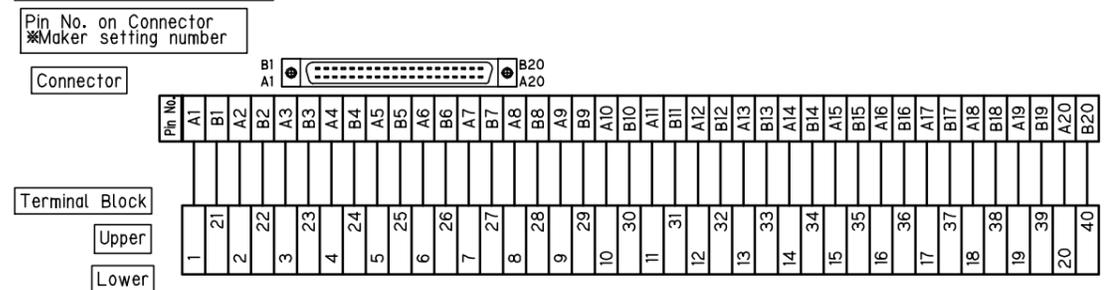

Conformity tool (Minus driver)



	Connector changed (FCN-364P040-AU; Fujitsu Component - 1747053-1: TE Connectivity)	2018.10.23	YAZAWA
	Rating is added.	2012.12/19	宮澤
改番 REV.	訂正記事 DESCRIPTION OF REVISION	年月日 DATE	担当 BY

承認 APPROVED 菅沼 2018/10/23	検図 CHECKED 小松 2018/10/23	製図 DRAWNG 宮澤 2012.12/19	設計 DESIGNED	名称 TITLE PCV5-4F402-TB40-K-CPU
製品コード CODE No.		単位 UNIT mm	尺度 SCALE 1 / 1	Specifications
東洋技研株式会社 TOYOGIKEN CO.,LTD.		公差 TOLERANCE		図番 DRAWNG No. TA12369-01
			REV.	SHEET 1 / 1