
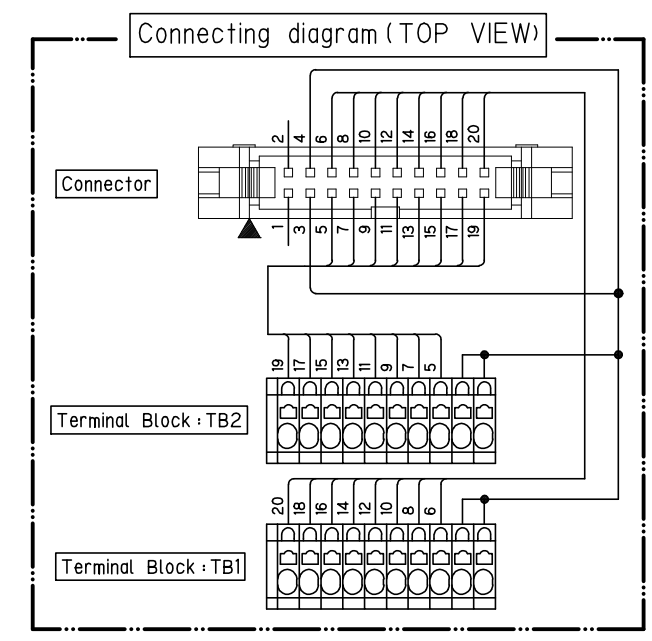
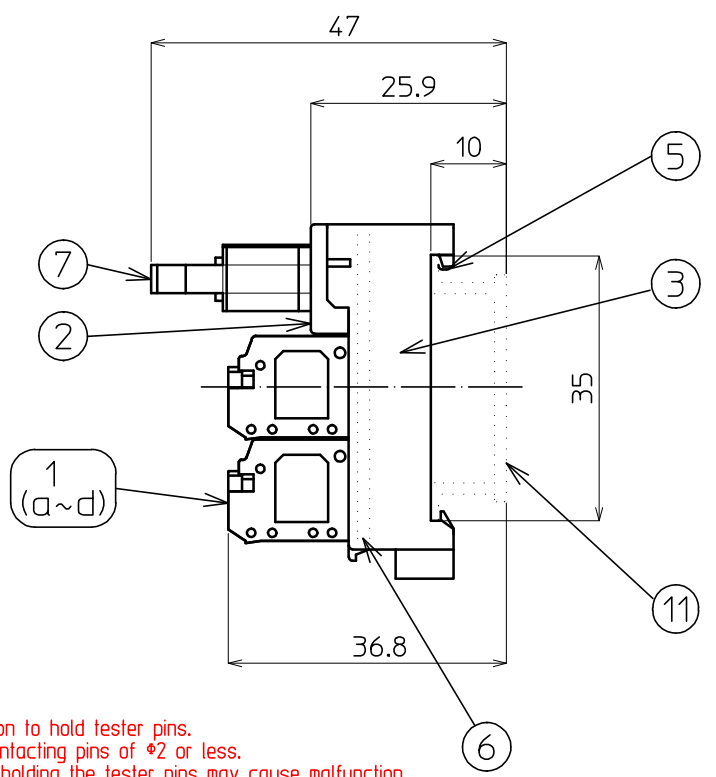


参考図

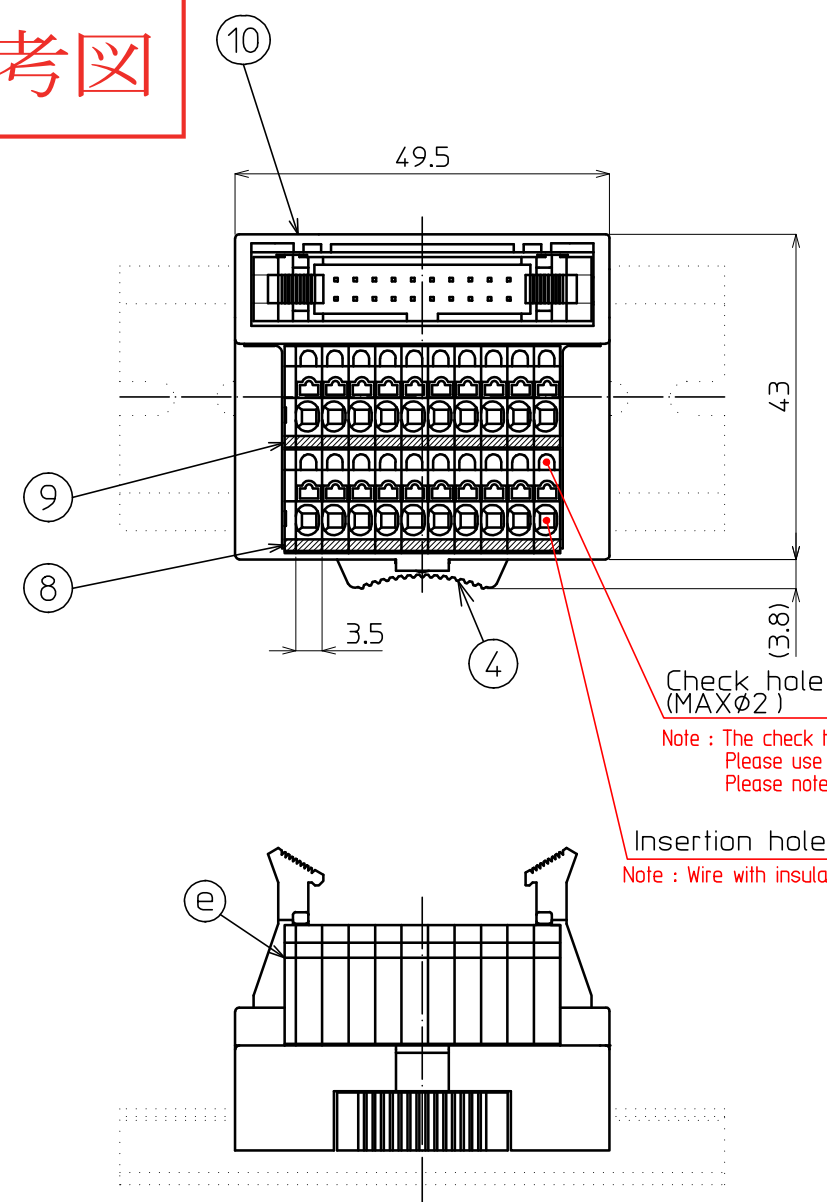

Check hole (MAX Ø2)  
 Note : The check holes do not have a function to hold tester pins.  
 Please use for continuity check by contacting pins of  $\phi 2$  or less.  
 Please note that forcibly pushing and holding the tester pins may cause malfunction.

Insertion hole  
 Note : Wire with insulation diameter of  $\phi 3.2$  or more cannot be used.

No.	The contents of printing								
⑨	10	11	12	13	14	15	16	17	COM
⑧	0	1	2	3	4	5	6	7	COM

Specification

No.	Description	Material	Size	Surface Treatment	Remarks	Quantity
1	Terminal Block 10P					2
a	Base	66Nylon(Gray)		Sn	UL94V-0	10set
b	Conductive Plate	Copper alloy				
c	Button	66Nylon(Orange)			UL94V-0	
d	Connecting Spring	SUS				
e	Side Plate	66Nylon(Gray)			UL94V-0	
2	Upper case	PBT (Ivory)			UL94V-0	1
3	Lower case	PBT (Ivory)			UL94V-0	1
4	Lock button	POM (yellow)				1
5	Spring	SUS				1
6	Substrate	Glass epoxy	t=1.6			1
7	Connector				HIROSE : HF3BA-20PA-254DSA(63)	1
8	Name seal TB1					1
9	Name seal TB2					1
10	Seal of form					1
11	Rail DIN35mm				* Optional	1


Rateds

Rating voltage	50V
Rating current	Sig:0.5A COM:2A
Insulation resistance	100M $\Omega$ or above (With DC500V)
Withstand voltage	AC500V / 1minute
Connectable wire	Pressure terminal 0.14mm <sup>2</sup> ~ 0.75mm <sup>2</sup> / AWG26~AWG18 Conformity DIN46228-4 8~12mm
	Single $\phi 0.3 \sim \phi 1.3$ 9~10mm
	Twist 0.08mm <sup>2</sup> ~ 1.5mm <sup>2</sup> / MAX AWG28~AWG16 9~10mm
Operating ambient temperature	-15℃~+60℃(No freezing or condensation)
Relative humidity	45~85%

\*Solid/Stranded wires with insulation of  $\phi 3.2$  or more cannot be used.

Weight  $\approx 50g$

How to move the unit attached to the DIN (35-mm width) rail

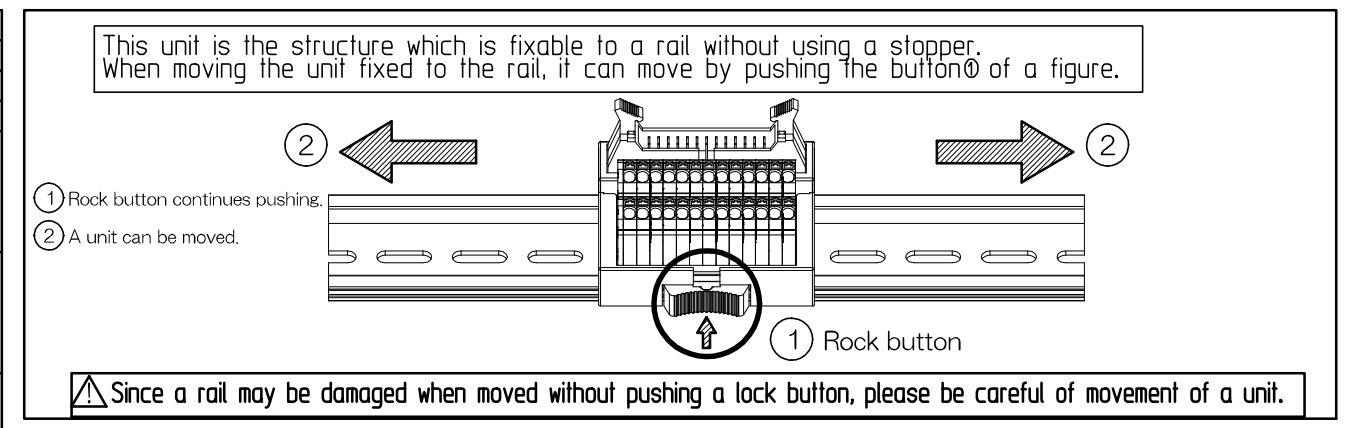

承認 APPROVED	検閲 CHECKED	製図 DRAWING	設計 DESIGNED	名称 TITLE
菅沼 2016. 2/15	小松 2016. 2/15	宮澤		PCX-1H20-TB20-M-XY
製品コード CODE No.		単位 UNIT mm	尺度 SCALE 1 / 1	Specifications
公差 TOLERANCE		図番 DRAWING No. TA16095-01		REV. SHEET 1 / 1

改番 REV.	訂正記事 DESCRIPTION OF REVISION	年月日 DATE	担当 BY