


参考図

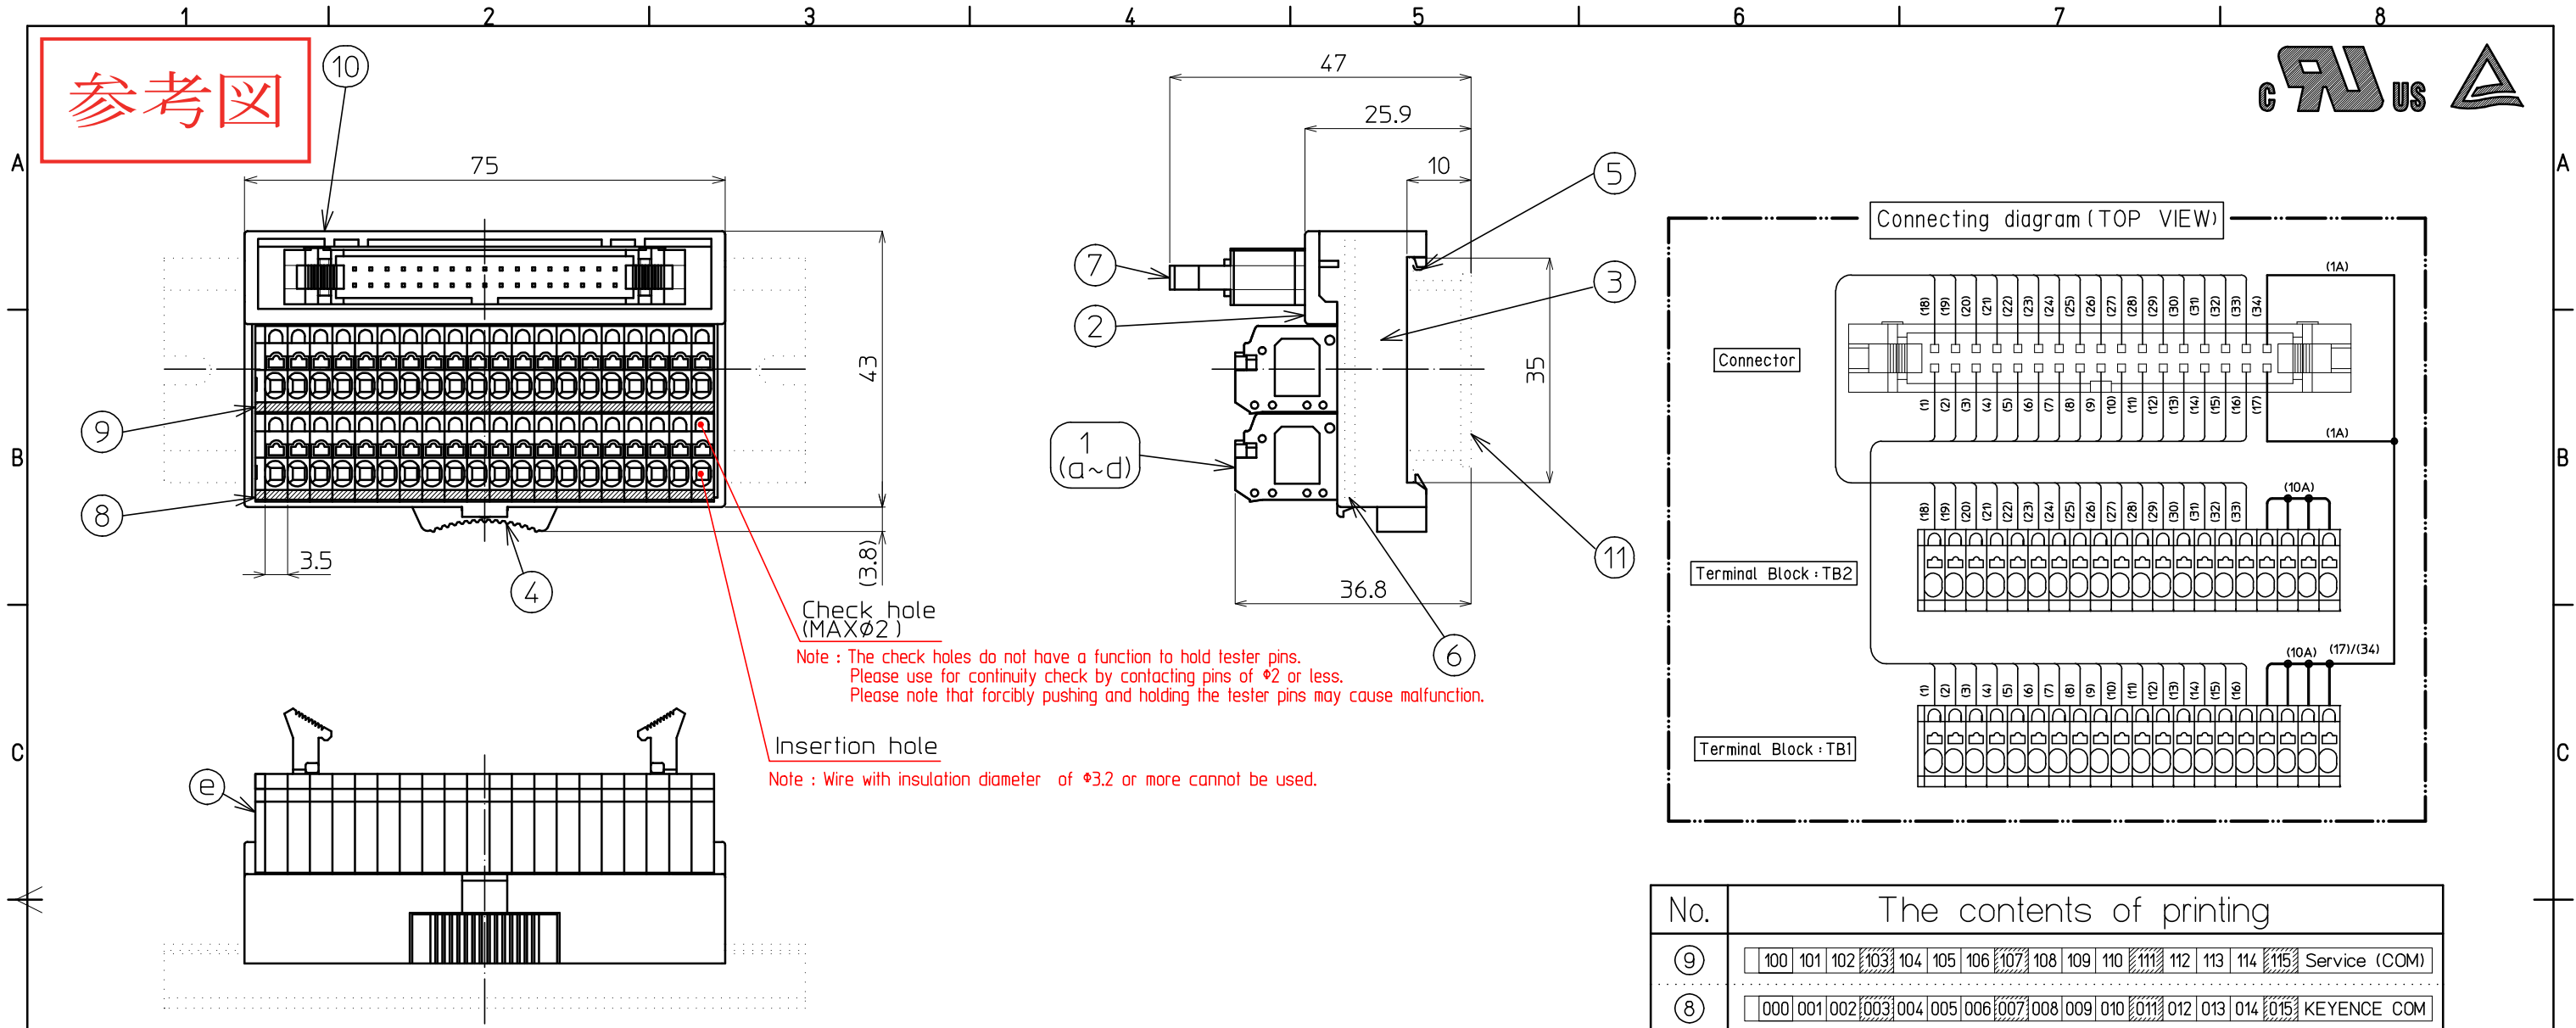

Specification

No.	Description	Material	Size	Surface Treatment	Remarks	Quantity
1	Terminal Block 20P					2
a	Base	66Nylon(Gray)		Sn	UL94V-0	20set
b	Conductive Plate	Copper alloy				
c	Button	66Nylon(Orange)			UL94V-0	
d	Connecting Spring	SUS				
e	Side Plate	66Nylon(Gray)			UL94V-0	
2	Upper case	PBT (Ivory)			UL94V-0	1
3	Lower case	PBT (Ivory)			UL94V-0	1
4	Lock button	POM (yellow)				1
5	Spring	SUS				1
6	Substrate	Glass epoxy	t=1.6			1
7	Connector				HIROSE : HIF3BA-34PA-254DSA (63)	1
8	Name seal TB1					1
9	Name seal TB2					1
10	Seal of form					1
11	Rail DIN35mm				* Optional	1


Rates

Rating voltage	125V
Rating current	1A
Insulation resistance	100M $\Omega$ or above (With DC500V)
Withstand voltage	AC500V / 1minute
Connectable wire	Pressure terminal 0.14mm <sup>2</sup> ~ 0.75mm <sup>2</sup> / AWG26~AWG18 Conformity DIN46228-4 8~12mm
	Single $\phi$ 0.3~ $\phi$ 1.3 9~10mm
	Twist 0.08mm <sup>2</sup> ~ 1.5mm <sup>2</sup> / MAX AWG28~AWG16 9~10mm
Operating ambient temperature	-15 $^{\circ}$ C~+60 $^{\circ}$ C(No freezing or condensation)
Relative humidity	45~85%

\*Solid/Stranded wires with insulation of  $\phi$ 3.2 or more cannot be used.

Weight 約82g

How to move the unit attached to the DIN (35-mm width) rail

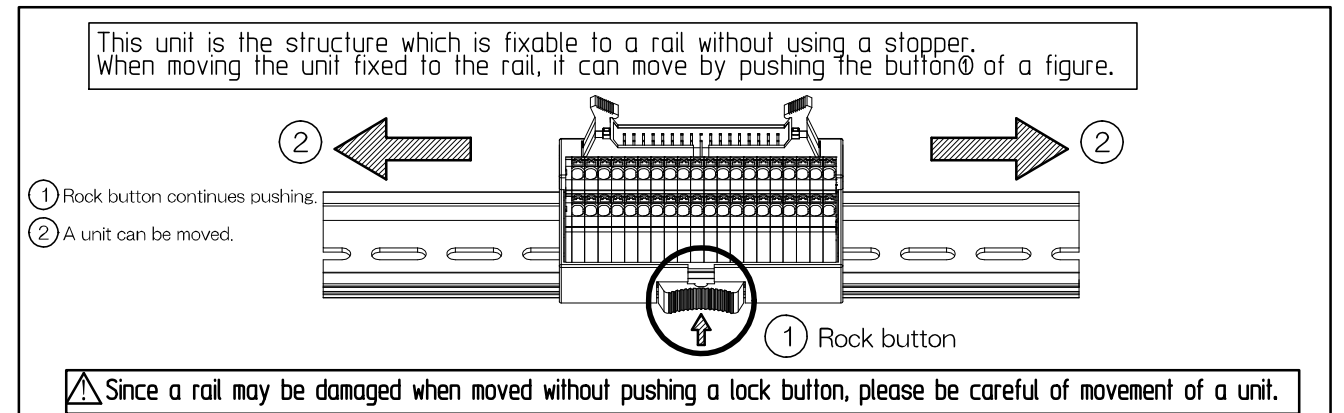

承認 APPROVED	検閲 CHECKED	製図 DRAWING	設計 DESIGNED	名称 TITLE
菅沼 2016. 2/15	小松 2016. 2/15	宮澤		PCX-1H34-TB40-K2
製品コード CODE No.	単位 UNIT	尺度 SCALE	Specifications	
	mm	1 / 1		
公差 TOLERANCE		図番 DRAWING No.	REV.	SHEET
		TA16107-01		1 / 1

改番 REV.	訂正記事 DESCRIPTION OF REVISION	年月日 DATE	担当 BY