
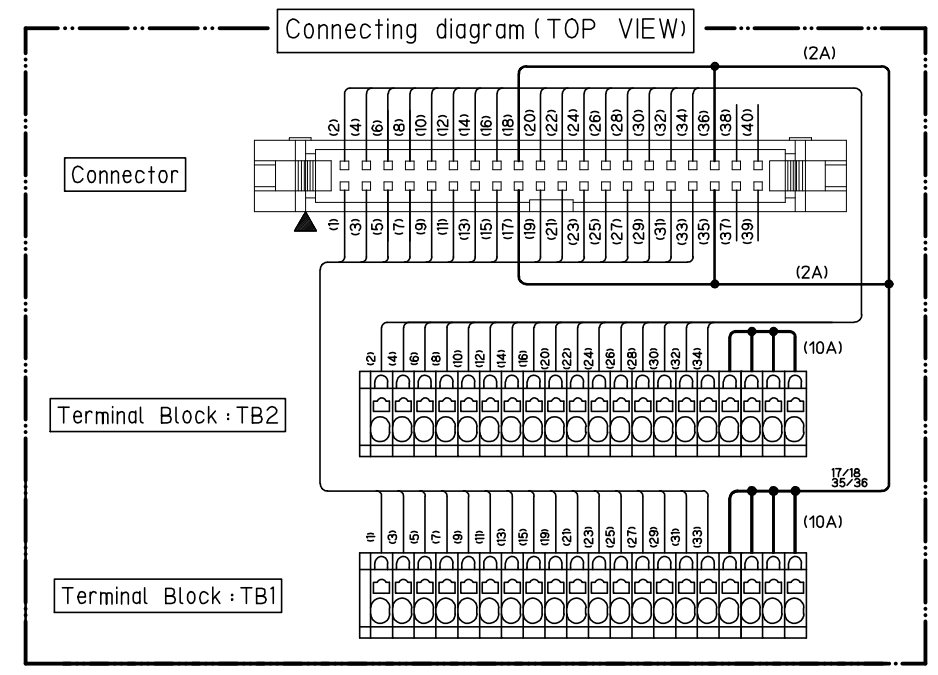
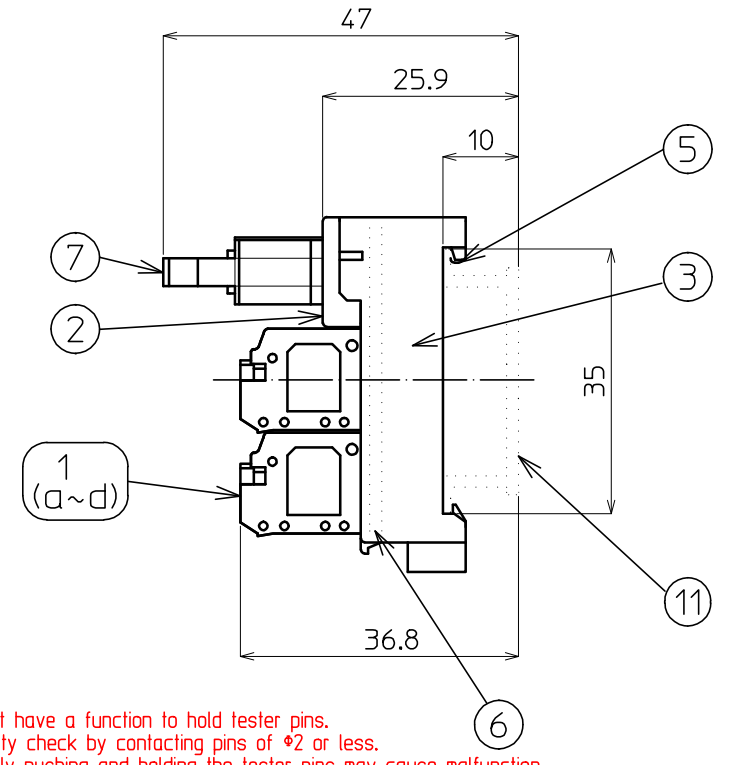


参考図

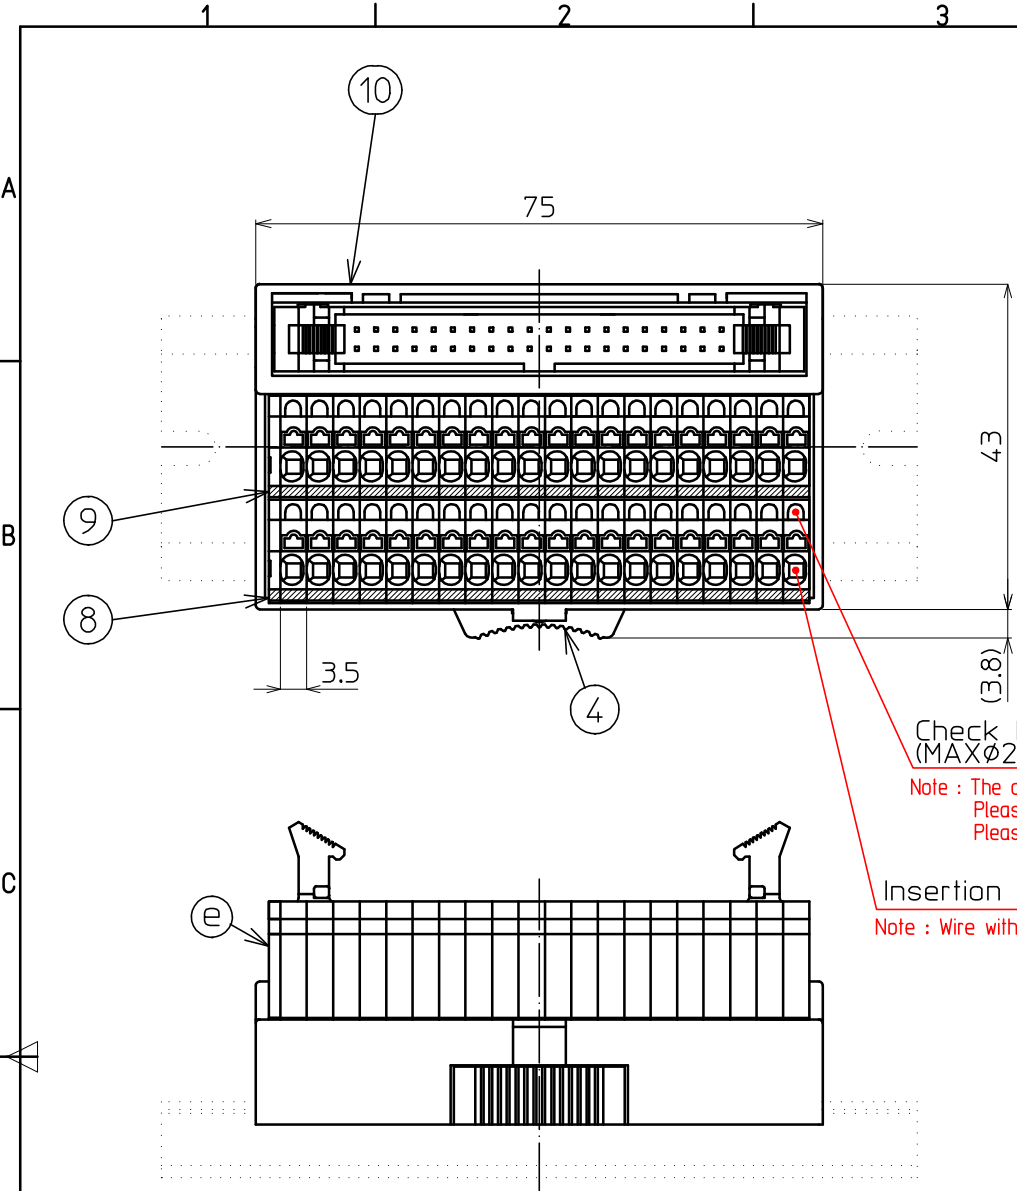

No.	The contents of printing
⑨	100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 Service (COM)
⑧	000 001 002 003 004 005 006 007 008 009 010 011 012 013 014 015 PLC-COM

Specification

No.	Description	Material	Size	Surface Treatment	Remarks	Quantity
1	Terminal Block 20P					2
a	Base	66Nylon(Gray)		Sn	UL94V-0	20set
b	Conductive Plate	Copper alloy				
c	Button	66Nylon(Orange)			UL94V-0	
d	Connecting Spring	SUS				
e	Side Plate	66Nylon(Gray)			UL94V-0	
2	Upper case	PBT (Ivory)			UL94V-0	1
3	Lower case	PBT (Ivory)			UL94V-0	1
4	Lock button	POM (yellow)				1
5	Spring	SUS				1
6	Substrate	Glass epoxy	t=1.6			1
7	Connector				HIROSE : HF3BA-40PA-254DSA (63)	1
8	Name seal TB1					1
9	Name seal TB2					1
10	Seal of form					1
11	Rail DIN35mm				* Optional	1


Rateds

Rating voltage	50V
Rating current	Sig:0.5A COM:2A
Insulation resistance	100MΩ or above (With DC500V)
Withstand voltage	AC500V / 1minute
Connectable wire	Pressure terminal 0.14mm ² ~ 0.75mm ² / AWG26~AWG18 Conformity DIN46228-4 8~12mm
	Single φ0.3~φ1.3 9~10mm
	Twist 0.08mm ² ~ 1.5mm ² / MAX AWG28~AWG16 9~10mm
Operating ambient temperature	-15℃~+60℃(No freezing or condensation)
Relative humidity	45~85%

*Solid/Stranded wires with insulation of φ3.2 or more cannot be used.

Weight 約83g

How to move the unit attached to the DIN (35-mm width) rail

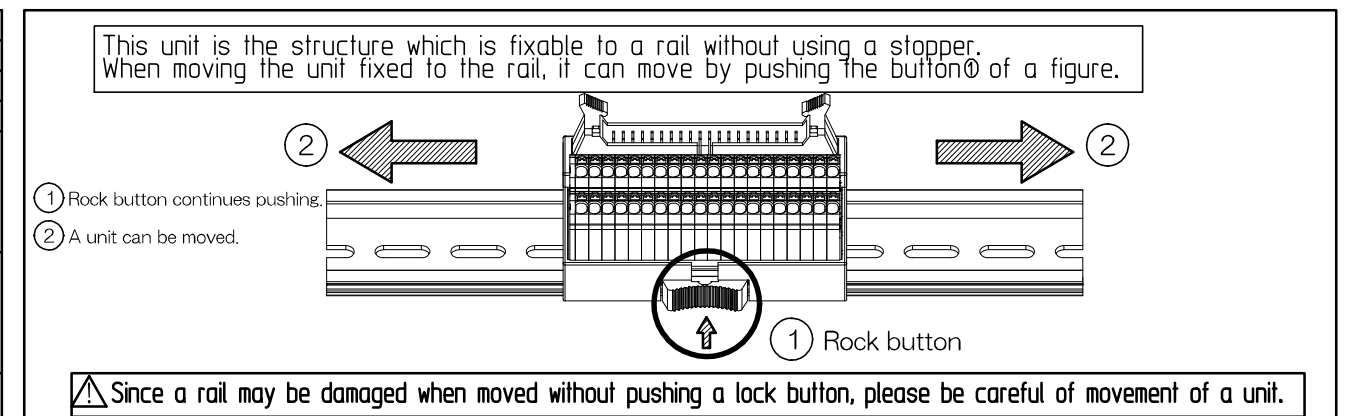

承認 APPROVED	検閲 CHECKED	製図 DRAWING	設計 DESIGNED	名称 TITLE
菅沼 2016. 2/15	小松 2016. 2/15	宮澤		PCX-1H40-TB40-01
製品コード CODE No.		単位 UNIT mm	尺度 SCALE 1 / 1	Specifications
公差 TOLERANCE		図番 DRAWING No. TA16098-01	REV. SHEET 1 / 1	

改番 REV.	訂正記事 DESCRIPTION OF REVISION	年月日 DATE	担当 BY