
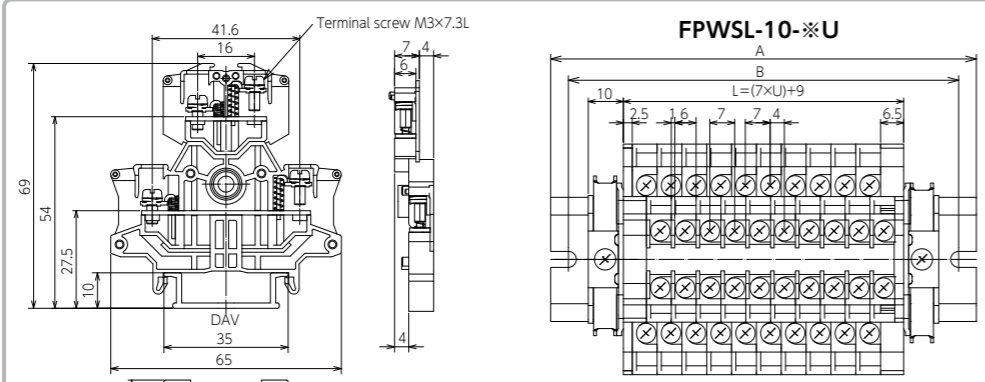


### FPWS-10

#### Rating

	JIS(IEC)	UL/cUL
Rated voltage	600V	600V
Rated current	15A	16A
Applicable wire	0.75~1.25mm <sup>2</sup>	AWG20~16

Terminal screw	M3×7.3L Pan head sems(±)
Tightening torque	0.5~1.2N·m
Mass	15.6g
Sales lot	50

No. of units (※)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Total length of terminal (L)	16	23	30	37	44	51	58	65	72	79	86	93	100	107	114
Total length of Rail (A)	60	60	80	80	80	100	100	100	120	120	140	140	140	160	160
Installation pitch (B)	50	50	70	70	70	90	90	90	110	110	130	130	130	150	150
No. of units (※)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Total length of terminal (L)	121	128	135	142	149	156	163	170	177	184	191	198	205	212	219
Total length of Rail (A)	160	180	180	180	200	200	200	220	220	240	240	240	260	260	260
Installation pitch (B)	150	170	170	170	190	190	190	210	210	210	230	230	230	250	250

※When you use DAV4

#### Accessories


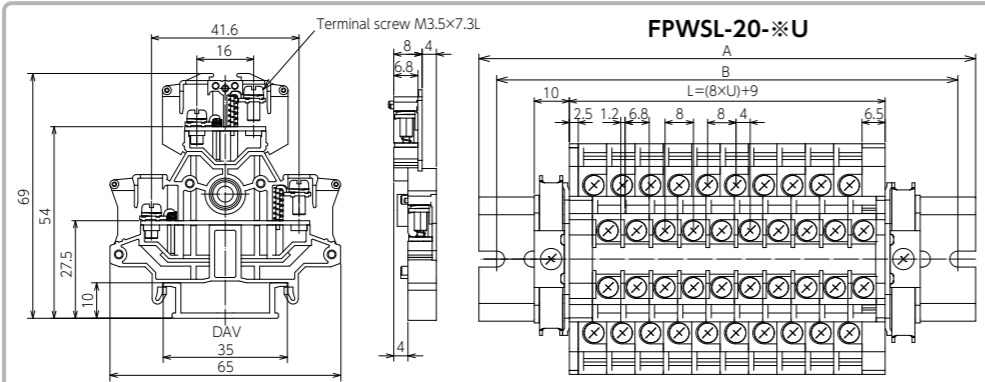
End plate	FPWS-1E(13.5g)
Name plate	M-1LE
Stopper	HDV-4
Rail	DAV(DAS)

### FPWS-20

#### Rating

	JIS(IEC)	UL/cUL
Rated voltage	800V	600V
Rated current	22A	20A
Applicable wire	1.25~2mm <sup>2</sup>	AWG18~14

Terminal screw	M3.5×7.3L Pan head sems(±)
Tightening torque	0.8~1.4N·m
Mass	18.1g
Sales lot	50

No. of units (※)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Total length of terminal (L)	17	25	33	41	49	57	65	73	81	89	97	105	113	121	129
Total length of Rail (A)	60	60	80	80	100	100	100	120	120	140	140	140	160	160	180
Installation pitch (B)	50	50	70	70	90	90	90	110	110	130	130	130	150	150	170
No. of units (※)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Total length of terminal (L)	137	145	153	161	169	177	185	193	201	209	217	225	233	241	249
Total length of Rail (A)	180	180	200	200	220	220	220	240	240	260	260	260	280	280	300
Installation pitch (B)	170	170	190	190	210	210	210	230	230	250	250	250	270	270	290

※When you use DAV4

#### Accessories


End plate	FPWS-1E(13.5g)
Name plate	M-1LE
Stopper	HDV-4
Rail	DAV(DAS)

### Direct-mounting assembly terminal block

※We assemble terminal blocks with your request poles and make the shipment here.

#### Materials

End plate	modified PPE(UL94V-0)
Spring	SUS
Mass	FPS-K: 4.9g FPS-100K:16.7g

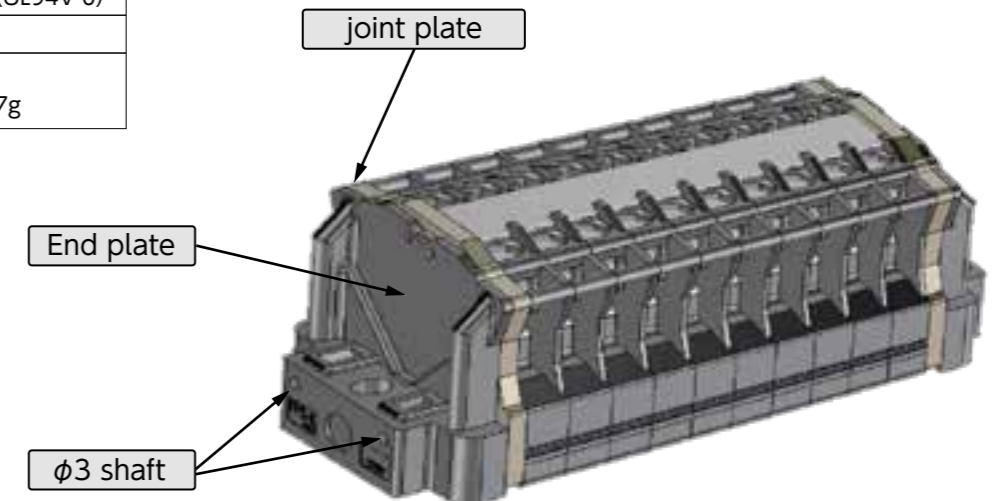


### FPSK-10-※P

#### Rating

Rated voltage	800V
Rated current	15A
Applicable wire	0.75~1.25mm <sup>2</sup>
Terminal screw	M3×7.3L Pan head sems(±)
Tightening torque	0.5~1.2N·m
No. of poles	1~30P

#### Accessories

End plate	FPS-K
Joint plate	FPS-1J
Shaft	SF3
Name plate	AM-10

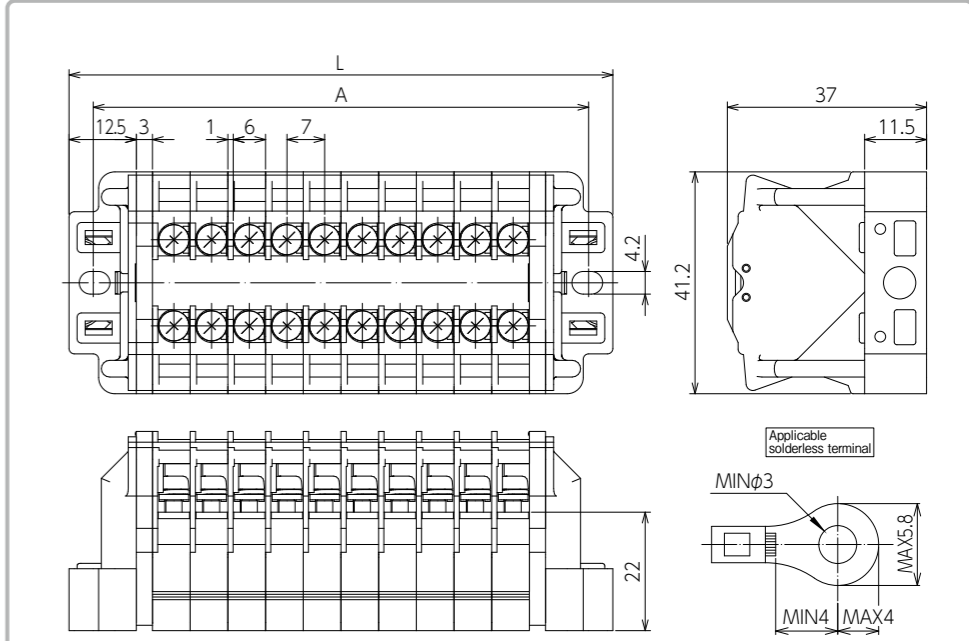

No. of poles (※)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Total length of terminal (L)	38	45	52	59	66	73	80	87	94	101	108	115	122	129	136
Installation pitch (A)	29	36	43	50	57	64	71	78	85	92	99	106	113	120	127
Shaft length	36	43	50	57	64	71	78	85	92	99	106	113	120	127	134
No. of poles (※)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Total length of terminal (L)	143	150	157	164	171	178	185	192	199	206	213	220	227	234	241
Installation pitch (A)	134	141	148	155	162	169	176	183	190	197	204	211	218	225	232
Shaft length	141	148	155	162	169	176	183	190	197	204	211	218	225	232	239