


【注文形式】



仕様 耐電圧/AC1500V 1分間
材質 端子部:黄銅(Niメッキ)

【寸法図】




SBRタイプ (各ピッチ丸型端子形状)

【寸法表】

寸法単位(mm)


呼称	P	形式名	極数	A	共通寸法	定格通電電流	販売単位
7A	7mm	SBR7A-2	2	12.7	W:5.7 M:3.2	t:0.6 D1:20 D2:15.7 D3:4	50
		SBR7A-10	10	68.7			50
		SBR7A-50	50	348.7			50
8	8mm	SBR8-2	2	14.5	W:6.5 M:3.8	t:0.6 D1:18 D2:13.3 D3:4	50
		SBR8-10	10	78.5			50
		SBR8-50	50	398.5			50
8A	8mm	SBR8A-2	2	14.5	W:6.5 M:3.8	t:0.6 D1:20 D2:15.7 D3:4	50
		SBR8A-10	10	78.5			50
		SBR8A-50	50	398.5			50
10	10mm	SBR10-2	2	18.2	W:8.2 M:4.3	t:0.6 D1:23.2 D2:18.5 D3:6	50
		SBR10-4	4	38.2			50
		SBR10-10	10	98.2			50
		SBR10-20	20	198.2			50

【注文形式】



仕様 耐電圧/AC1500V 1分間
材質 端子部:黄銅(Niメッキ)

【寸法図】

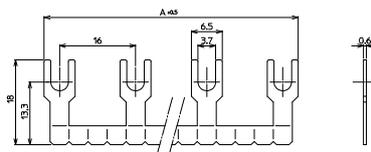

SB8-Jタイプ (8mmピッチ1極跳びY端子形状)

【寸法表】

寸法単位(mm)

極数	A	定格通電電流	販売単位
2	22.5	20A	50
4	54.5		50
10	150.5		50
20	310.5		50

【当社適合端子台一覧】

形式	適合端子台
SBR7A-2	PTU-10 PT-SS10 PT-10 PUW-10
SBR8-2	AT-10 ATJ-10 CT-15S CT-15 RT-20S PUW-20 CTW-15S2 CTW-15R DT-15
SBR8A-2	PTU-20 PT-SS20 PT-20 PUW-20
SB10-2	PTU-30 AT-15L ATJ-20 PT-30 RT-30S PUW-30
SB8- [] J	AT-10 ATJ-10 CT-15S CT-15 RT-0S O UW-20 CTW-15S2 CTW-15R DT-15