



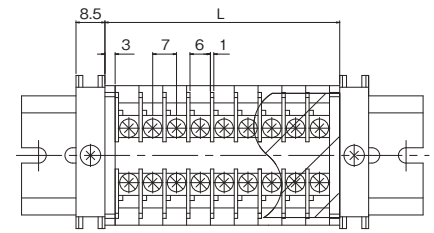


## PTU-10

M3/1.25mm<sup>2</sup> 15A

RoHS

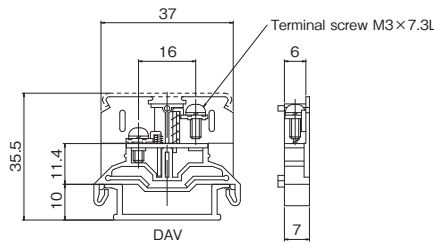

Applicable solderless terminal



### Rating

| Applicable wire / Rated current |                     | UL, CSA             | TÜV                 | Terminal screw    | Tightening torque |
|---------------------------------|---------------------|---------------------|---------------------|-------------------|-------------------|
| 0.75mm <sup>2</sup>             | 1.25mm <sup>2</sup> | AWG20~16 (stranded) | AWG20~16 (stranded) | M3 x 7.3L         | 0.5~1.2N·m        |
| 800V/11A                        | 800V/15A            | 600V/15A            | 600V/15A            | Pan head sems (±) |                   |

Assembly terminal block

(assembled at the factory and shipped)

Order format:

PTUL2-10-□P (□ : No. of poles)

Total length of terminal block (L) = Terminal width (7mm) x No. of poles (□P) + End plate x 2 (6mm)

|                     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| No. of poles (P)    | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  | 11  | 12  | 13  | 14  | 15  |
| Terminal length (L) | 13  | 20  | 27  | 34  | 41  | 48  | 55  | 62  | 69  | 76  | 83  | 90  | 97  | 104 | 111 |
| No. of poles (P)    | 16  | 17  | 18  | 19  | 20  | 21  | 22  | 23  | 24  | 25  | 26  | 27  | 28  | 29  | 30  |
| Terminal length (L) | 118 | 125 | 132 | 139 | 146 | 153 | 160 | 167 | 174 | 181 | 188 | 195 | 202 | 209 | 216 |

See "DAV4 Rail length" at page 21.



| Terminal block  | End plate        | Cover          | Name plate     | Rail            | Stopper         | Short bar                |
|-----------------|------------------|----------------|----------------|-----------------|-----------------|--------------------------|
| PTU-10 (5.75g)  | PTU-10L2 (2.30g) | CA-34          | AM-10          | DAV4            | HDV-1 (17.8g)   | SB (R) 7A-※, □B (R) 7A-※ |
| Sales lot (100) | Sales lot (100)  | Sales lot (20) | Sales lot (50) | Sales lot (100) | Sales lot (100) | —                        |

※Short bar is option.


## PTU-20

M3.5/2mm<sup>2</sup> 22A

RoHS

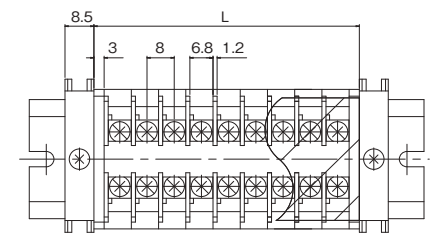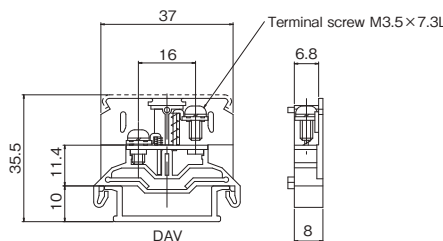

Applicable solderless terminal



### Rating

| Applicable wire / Rated current |                  | UL, CSA             | TÜV                 | Terminal screw    | Tightening torque |
|---------------------------------|------------------|---------------------|---------------------|-------------------|-------------------|
| 1.25mm <sup>2</sup>             | 2mm <sup>2</sup> | AWG16~14 (stranded) | AWG20~14 (stranded) | M3.5 x 7.3L       | 0.8~1.4N·m        |
| 800V/16A                        | 800V/22A         | 600V/19A            | 600V/22A            | Pan head sems (±) |                   |

Assembly terminal block

(assembled at the factory and shipped)

Order format:

PTUL2-20-□P (□ : No. of poles)

Terminal length of terminal block (L) = Terminal width (8mm) x No. of poles (□P) + End plate x 2 (6mm)

|                     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| No. of poles (P)    | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  | 11  | 12  | 13  | 14  | 15  |
| Terminal length (L) | 14  | 22  | 30  | 38  | 46  | 54  | 62  | 70  | 78  | 86  | 94  | 102 | 110 | 118 | 126 |
| No. of poles (P)    | 16  | 17  | 18  | 19  | 20  | 21  | 22  | 23  | 24  | 25  | 26  | 27  | 28  | 29  | 30  |
| Terminal length (L) | 134 | 142 | 150 | 158 | 166 | 174 | 182 | 190 | 198 | 206 | 214 | 222 | 230 | 238 | 246 |

See "DAV4 Rail length" at page 21.

| Terminal block  | End plate        | Cover          | Name plate     | Rail            | Stopper         | Short bar                |
|-----------------|------------------|----------------|----------------|-----------------|-----------------|--------------------------|
| PTU-20 (6.63g)  | PTU-20L2 (2.35g) | CA-34          | AM-10          | DAV4            | HDV-1 (17.8g)   | SB (R) 8A-※, □B (R) 8A-※ |
| Sales lot (100) | Saves lot (100)  | Sales lot (20) | Sales lot (50) | Sales lot (100) | Sales lot (100) | —                        |

※Short bar is option.